

## STEP TREADS



**T1** Welding Fixing -  
no nosing



**T2** Bolted Fixing -  
no nosing



**T3** Welding Fixing -  
floor plate nosing



**T4** Bolted Fixing -  
floor plate nosing



**T5** Welding Fixing -  
abrasive nosing



**T6** Bolted Fixing -  
abrasive nosing


### WHEN ORDERING STEP TREADS THE FOLLOWING INFORMATION IS REQUIRED

- ✓ Grating type and load bar surface  
e.g R30A-325 SERRATED
- ✓ Tread size e.g 750 x 215mm
- ✓ Bolt in or Weld in treads?
- ✓ Nosing type required
- ✓ Quantity of treads required
- ✓ Material finish e.g Galvanised or mill finish


Nosing options can be retrofitted to  
grating star treads, as below:



RECOMMENDED MAXIMUM LENGTH			
Load Bar Size	25 x 5	32 x 5	40 x 5
Series 30	900	1300	1600
Series 40	750	1200	1500

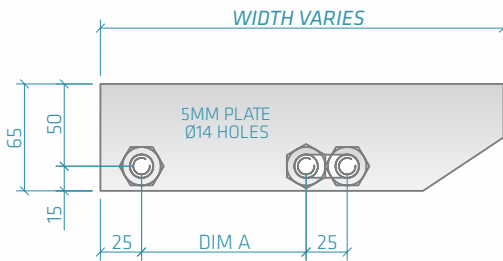

**25 & 32mm GRATING ENDPLATE**

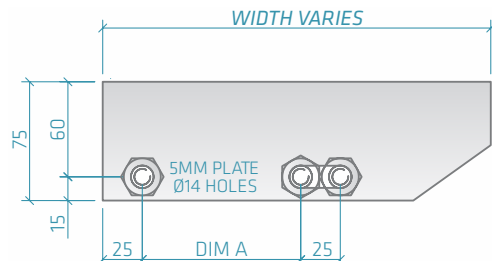

**40mm GRATING ENDPLATE**

RECOMMENDED STANDARD WIDTHS								
Dim 'A'	Hole Centres	45	75	75	100	100	100	100
Series 30	T2 - T8	125	155	185	215	245	275	305
Series 40	T2 - T8	125	165		205	245	285	325